

ALUMINIUM CLAD DOOR SIDE PANEL



Technical data:

Specifications	Measures (for 66mm profile)	Measures (for 76mm profile)
Opening height (mm)	1390-2490	1390-2790
Width range (mm)	600-2060	6m ² *
Glass thickness (mm)	26-36	36-46
Min jamb width (mm)	145	165
Threshold:		
Merbau (height, mm)	55	55

*whole construction (fixed frame) shouldn't exceed 6m² without any glass dividers;
with glass divider (spross) fixed frame width can be 620-3990

- 5 years warranty

Features of standard alu clad product:

- Wood: pine
- Opening: Fixed frame.
- Glass unit:
 - Triple glass with safety glasses inside and outside (4Tough-12Arg-4TH-12Arg-4Tough).
 - Glass unit U-value 1,0 (W/m²K);
- Coating:
 - Inside: Painted timber NCS S0502Y white;
 - Outside: Painted aluminium NCS S0502Y white.
- Threshold: Merbau oiled;


Available options:

- Wood: Either other types of timber (oak, teak etc.) or pine without fingerjoints;
- Coating:
 - RAL- and NCS- systems (different inside/outside colours),
 - Anodized in Nature,
 - Metallic,
 - Gloss 30
- Glass:
 - Wide range of glass units;
 - Glasses with warm edges;
 - Glazing bars: sprosses, mullions, duplexes.
- Higher brystning;
- Horizontal ventilation.


Door side panels combinations with sliding doors:



Three-panel sliding door with one active panel
plus two door side panels

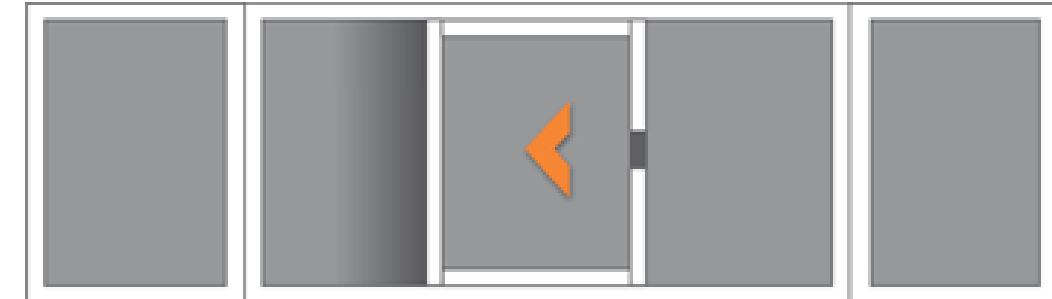

Four-panel panorama sliding doors
plus one door side panel

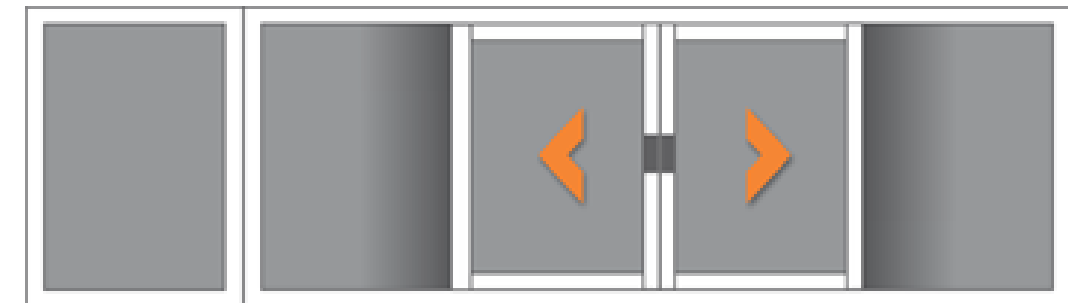

and others

For detail information visit our web site or contact us:

<https://www.panoramanordic.com>

e-mail: info@panoramanordic.com

Tel: +370 670 57503