

ALUMINIUM CLAD FOLDING DOOR



Technical features:

Specifications	Folding door
Max opening width (mm)	8000
Max panel weight (kg)	80
Max opening height (mm)	2500
Panel width (mm)	500-1000
Min panel thickness (mm)	66
Max number of panels	16
Loading (rails)	Top
Glass thickness (mm)	28

Features of standard alu clad product:

- Wood: Fingered pine,
- Type: Outward folding doors,
- Coating:
 - Inside: Painted timber NCS S0502Y white ,
 - Outside: Painted aluminium NCS S0502Y white.
- Glass unit:
 - Double glass with safety glasses inside and outside (4Tough – 20Arg – 4Tough).
- Hardware: Double handle,
- Lock: Lockable cylinder from both sides,
- Threshold: Merbau combined with aluminium.


Available options:

- Coating:
 - RAL- and NCS- systems (different inside/outside colours),
 - Anodized in Nature,
 - Metallic,
 - Gloss 30.
- Glass:
 - Others glass units' combinations (laminated, toughened, bioclean, etc.),
 - Glasses with warm edges,
 - Glazing bars: mulions, duplexes etc.
- Internal cylinder lock (lockable from the inside),
- Horizontal ventilation.

Samples of opening combination:




Three panel folding door

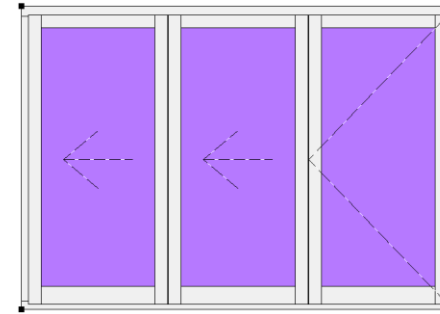


2L1R

Six panel folding door

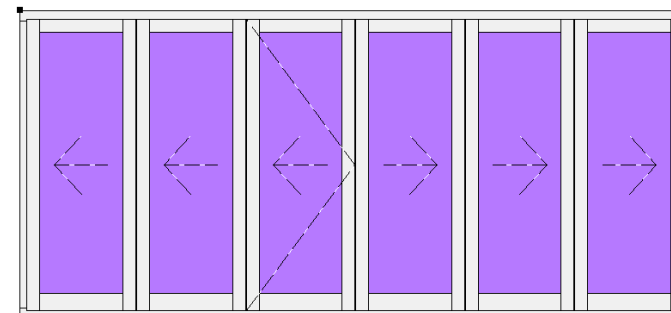

3L3R

Seven panel folding door

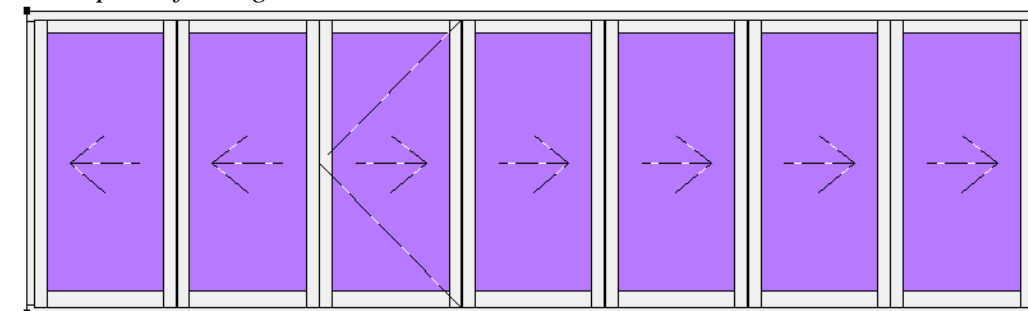

2L5R
and others

For detail information visit our web site or contact us:
<https://www.panoramanordic.com>
 e-mail: info@panoramanordic.com
 Tel: +370 670 57503